


RADIATOR/EXHAUST
DISCHARGE AIR
(BOTH SIDES)



960
[37.8]
CG (SEE NOTE 5)

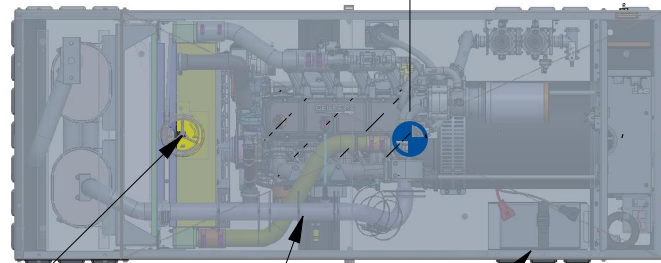

REMOVE COVER FOR
ACCESS TO RADIATOR
FILL CAP

OIL DRAIN

BATTERY 12V
GRP 27F
NEGATIVE GROUND
P/N G058665

AIR INTAKE
(BOTH SIDES)

TOP VIEW

SERVICE ITEM	4.5L
OIL FILL CAP	LEFT SIDE
OIL DIP STICK	LEFT SIDE
OIL FILTER	LEFT SIDE
OIL DRAIN HOSE	LEFT SIDE
RADIATOR DRAIN HOSE	RIGHT SIDE
COOLANT RECOVERY BOTTLE	RIGHT SIDE
RADIATOR FILL CAP	ROOF TOP
AIR CLEANER ELEMENT	EITHER SIDE
SPARK PLUGS	LEFT SIDE
MUFFLER	SEE NOTE 11
FAN BELT	EITHER SIDE
BATTERY	LEFT SIDE

REFERENCE OWNERS MANUAL
FOR PERIODIC REPLACEMENT
PART LISTINGS.


NOTES:

1. MINIMUM RECOMMENDED CONCRETE PAD SIZE: (6" LARGER PER SIDE THAN GENERATOR) 1269 (50") WIDE 2786 (110") LONG.
REFERENCE INSTALLATION GUIDE SUPPLIED WITH UNIT FOR CONCRETE PAD GUIDELINES.
2. ALLOW SUFFICIENT ROOM ON ALL SIDES OF THE GENERATOR FOR MAINTENANCE AND SERVICING. THIS UNIT MUST BE INSTALLED IN ACCORDANCE WITH CURRENT APPLICABLE NFPA 37 AND NFPA 70 STANDARDS AS WELL AS ANY OTHER FEDERAL, STATE, AND LOCAL CODES.
3. CONTROL PANEL / CIRCUIT BREAKER INFORMATION:
- SEE SPECIFICATION SHEET OR OWNERS MANUAL
- ACCESSIBLE THROUGH CUSTOMER ACCESS ASSEMBLY ON REAR OF GENERATOR.
4. INSIDE STUB-UP AREA FOR AC LOAD LEAD CONDUIT CONNECTION, NEUTRAL CONNECTION, BATTERY CHARGER 120 VOLT AC (.5 AMP MAX) CONNECTION AND ACCESS TO TRANSFER SWITCH CONTROL WIRES. REMOVE REAR COVER FOR ACCESS.
5. CENTER OF GRAVITY AND WEIGHT MAY CHANGE DUE TO UNIT OPTIONS.
6. BOTTOM OF GENERATOR SET MUST BE ENCLOSED TO PREVENT PEST INTRUSION AND RECIRCULATION OF DISCHARGE AIR AND/OR IMPROPER COOLING AIR FLOW.
7. REFERENCE OWNERS MANUAL FOR LIFTING WARNINGS.
8. MOUNTING BOLTS OR STUDS TO MOUNTING SURFACE SHALL BE 5/8-11 GRADE 5 (USE STANDARD SAE TORQUE SPECS)
9. MUST ALLOW FREE FLOW OF INTAKE AIR, DISCHARGE AIR AND EXHAUST. SEE SPEC SHEET FOR MINIMUM AIR FLOW AND MAXIMUM RESTRICTION REQUIREMENTS.
10. GENERATOR MUST BE INSTALLED SUCH THAT FRESH COOLING AIR IS AVAILABLE AND THAT DISCHARGE AIR FROM RADIATOR IS NOT RECIRCULATED.
11. REMOVE FRONT END PANEL TO ACCESS EXHAUST MUFFLER. ACCESS AVAILABLE THROUGH DOORS TO FAN BELT.

EXHAUST MUFFLER
ENCLOSED WITHIN
GENERATOR ENCLOSURE
SEE NOTES 9, 10 & 11

RADIATOR/EXHAUST
DISCHARGE AIR


1041.4 [41.00]
DOOR WIDTH TYP

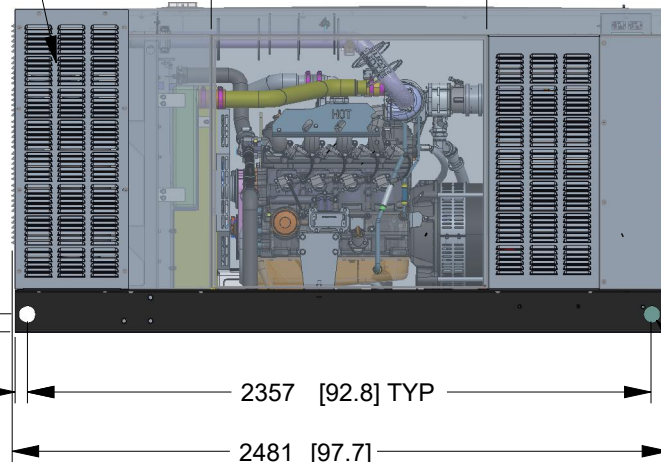

LEFT VIEW

CIRCUIT BREAKER
SEE NOTE 3

1241 [48.9]
OVERALL
HEIGHT




REAR ENCLOSURE
COVER PANEL
SEE NOTE 4

CUSTOMER ACCESS
ASSEMBLY, CONTROL
PANEL ACCESS
BATTERY CHARGER
LOCATED WITHIN
SEE NOTE 3 & 4

964 [38.0]
OVERALL WIDTH
REAR VIEW

VICE ACTION LATCH
ONE PER DOOR
ONE LIFT OFF DOOR PER
SIDE OF GENERATOR

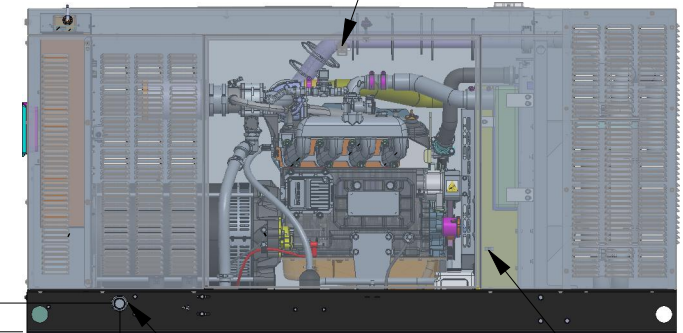

FUEL LINE CONNECTION
1-1/4" NPT FEMALE TEE
THROUGH BASE FRAME OPENING

RADIATOR DRAIN

RIGHT VIEW

DRAWING CREATED FROM PRO/ENGINEER
3D FILE. ECO MODIFICATION TO BE
APPLIED TO SOLID MODEL ONLY.

DIMENSIONS: MM [INCH]

WEIGHT DATA				
ENGINE/KW	ENCLOSURE MATERIAL	WEIGHT GENSET ONLY KG [LBS]	WEIGHT SHIPPING SKID KG [LBS]	SHIPPING WEIGHT KG [LBS]
4.5L/60KW	AL	857 (1890)	79 [175]	936 (2064)
4.5L/80KW	AL	903 (1990)	79 [175]	983 (2165)

GENERAC POWER SYSTEMS OWNS THE COPYRIGHT OF THIS DRAWING WHICH IS SUPPLIED IN CONFIDENCE AND MUST NOT BE USED FOR ANY PURPOSE OTHER THAN FOR WHICH IT IS SUPPLIED WITHOUT THE EXPRESS WRITTEN CONSENT OF GENERAC POWER SYSTEMS. ©GENERAC POWER SYSTEMS 2013

ELECTRONICALLY APPROVED
INSIDE WINDCHILL

GENERAC

TITLE

INSTALL G4.5L G26 60-80KW C3

ISSUE DATE:

SIZE
B

CAGE NO
N/A

DWG NO

A0000293264

REV
B

SCALE

0.035


WT-KG

SHEET


1 of 2

INSTALLATION DRAWING


*NOTE:
STUB-UP AREA FOR HIGH AND LOW
VOLTAGE CONNECTIONS, CIRCUIT BREAKER,
NEUTRAL AND CUSTOMER CONNECTION OPENING.

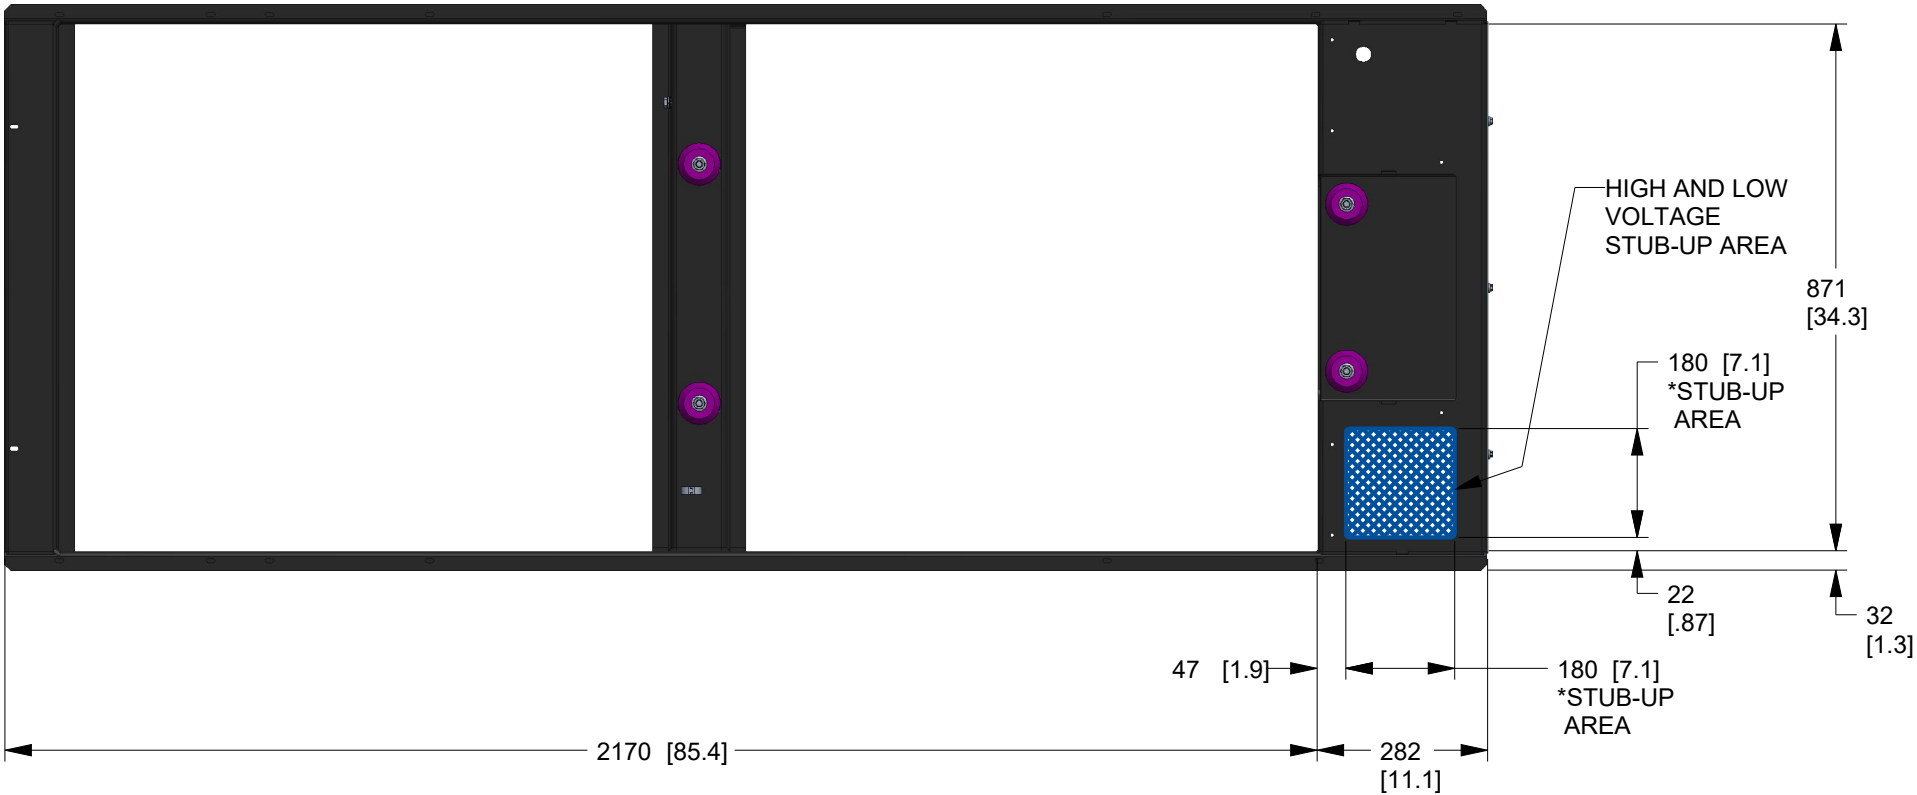

TOP VIEW

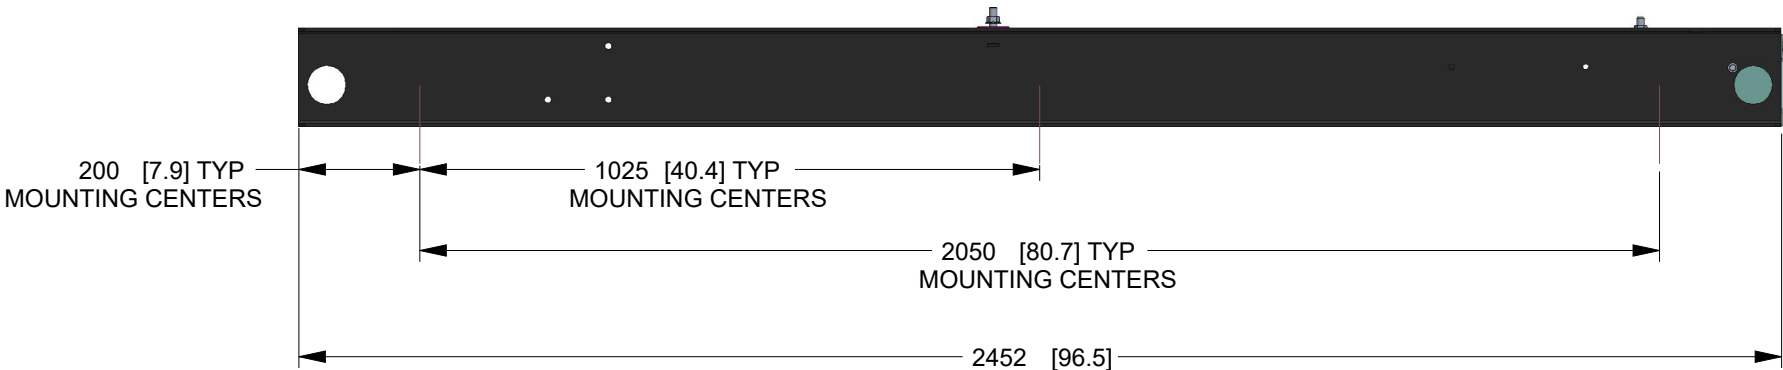

LEFT VIEW

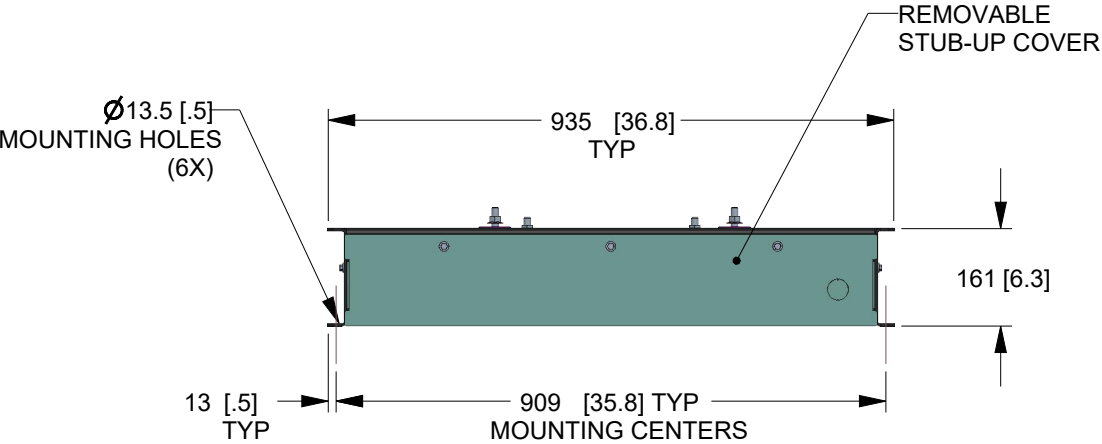

REAR VIEW

DRAWING CREATED FROM PRO/ENGINEER
3D FILE. ECO MODIFICATION TO BE
APPLIED TO SOLID MODEL ONLY.

INSTALLATION DRAWING

GENERAC POWER SYSTEMS OWNS THE COPYRIGHT OF THIS DRAWING
WHICH IS SUPPLIED IN CONFIDENCE AND MUST NOT BE USED FOR
ANY PURPOSE OTHER THAN FOR WHICH IT IS SUPPLIED WITHOUT
THE EXPRESS WRITTEN CONSENT OF GENERAC POWER SYSTEMS.
©GENERAC POWER SYSTEMS 2013

ELECTRONICALLY APPROVED
INSIDE WINDCHILL



TITLE				
INSTALL STUB-UP VIEW G4.5L G26 60-80KW C3				
ISSUE DATE:				
SIZE B	CAGE NO N/A	DWG NO A0000293264	REV B	
SCALE	0.080	WT-KG	SHEET	2 of 2